

Data Sheet(Preliminary)

850nm 25Gb/s multimode VCSEL A03

Dogain Optoelectronic Technology (Suzhou) Co., Ltd.

PN: DG-M-V850-N25STB
DG-M-V850-N25FTB

Rev. 3.0

May. 2026

Note: Customers represent that they have all the necessary expertise to create and implement their own safeguards that anticipate dangerous failures, monitor failures and their consequences, lessen the likelihood of dangerous failures and take appropriate remedial actions.

本文件及其披露的任何数据的所有权均属于度亘核芯光电技术（苏州）股份有限公司，构成并包含专有信息。除非度亘核芯光电技术（苏州）股份有限公司明确书面授权，否则不具有任何接收或拥有本文件授予或转让复制、使用或披露本文件所含任何信息的权利。

This document including data belongs to the property of DoGain Optoelectronic Technology (Suzhou) Co. Ltd. solely. Unless authorized in written, any kind of copying, forwarding, disclosing, receiving this document or any part of it is not allowed.

DG

REV: A03

商业秘密

Product Introduction

Performance characteristics

DoGain's DG-M-V850-N25STB is an 850nm, 250um*250um*150um size (single chip) and multimode vertical cavity surface emitting laser diode chip for using in non-hermetic environment up to 25Gb/s.

DoGain's DG-M-V850-N25FTB is an 850nm, 250um*1000um*150um size (1x4 Array) and multimode vertical cavity surface emitting laser diode chip for using in non-hermetic environment up to 25Gb/s.

Key Features

- 850nm multimode vertical cavity surface emitting laser
- Data rates from DC to 25Gb/s
- Available as single chip and 4 channel arrays
- Top-anode and Top-cathode configuration
- High humidity robustness
- RoHS compliant

Application

- HDMI
- Multimode datacom

Electro-optical characteristics (25°C)

Parameters	Symbol	Min	Typical	Max	Units	Test Condition
Optical Output Power	P _{OP}	3	-	6	mW	I _{op} =7.5mA, T _s =25C
Threshold Current	I _{th}	-	1	1.5	mA	T _s =25C
Differential resistance	R _s	-	70	90	Ω	I _{op} =7.5mA, T _s =25C
Operating Voltage	V _{op}	1.8	2.1	2.4	V	I _{op} =7.5mA, T _s =25C
Slope Efficiency	η _s		0.65	-	mW/mA	I _{op} =7.5mA, T _s =25C
Wavelength	λ _{peak}	840	-	860	nm	I _{op} =7.5mA, T _s =25C
Center Emission Wavelength Temperature Variation	Δλ/ΔT	-	0.07	-	nm/°C	-
Small Signal Bandwidth	f _{-3dB}	-	17	-	GHz	I _{op} =7.5mA, T _s =25C
Relative Intensity Noise	RIN		-137	-128	dB/Hz	I _{op} =7.5mA, T _s =25C
Spectral Width (RMS)	Δλ	-	-	0.6	nm	I _{op} =7.5mA, T _s =25C
Beam Full Divergence (D86)	φ	-	26	-	°	I _{op} =7.5mA, T _s =25C

* All tests are under CW condition with heatsink temperature 25°C

本文件及其披露的任何数据的所有权均属于度亘核芯光电技术（苏州）股份有限公司，构成并包含专有信息。除非度亘核芯光电技术（苏州）股份有限公司明确书面授权，否则不具有任何接收或拥有本文件授予或转让复制、使用或披露本文件所含任何信息的权利。

This document including data belongs to the property of DoGain Optoelectronic Technology (Suzhou) Co. Ltd. solely. Unless authorized in written, any kind of copying, forwarding, disclosing, receiving this document or any part of it is not allowed.


DG

REV: A03

商业秘密

Product appearance mechanical characteristics

Parameter	Symbol	Min.	Typ.	Max.	Unit
Die Length, DG-M-V850-N25STB	L	230	250	270	μm
Die Length, DG-M-V850-N25FTB	L	980	1000	1020	μm
Die Width	W	230	250	270	μm
Die Thickness	T	135	150	165	μm
Bond pad gold metalization thickness		-	1	-	μm

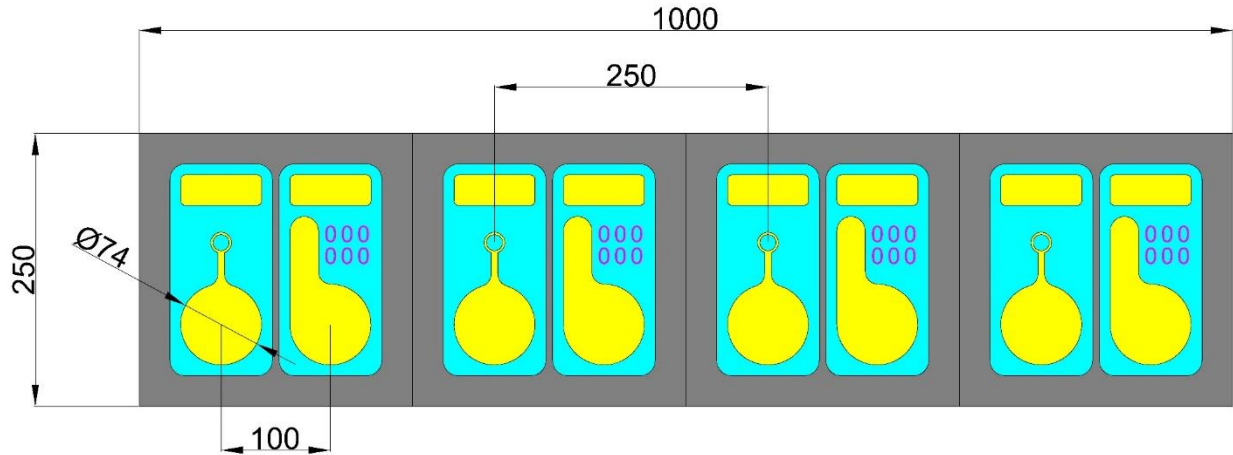

Absolute Maximum Ratings

Parameter	Symbol	Min.	Max.	Units
Operating temperature	Top	0	70	°C
Operating humidity	Hop	0	85	%
Storage temperature	Ts	-40	125	°C
Storage humidity	Hs	0	85	%

Unless modified in the Terms of Sale, the Product Specification may not be extended, including, but not limited to, any warranties made herein.

本文件及其披露的任何数据的所有权均属于度亘核芯光电技术（苏州）股份有限公司，构成并包含专有信息。除非度亘核芯光电技术（苏州）股份有限公司明确书面授权，否则不具有任何接收或拥有本文件授予或转让复制、使用或披露本文件所含任何信息的权利。

This document including data belongs to the property of DoGain Optoelectronic Technology (Suzhou) Co. Ltd. solely. Unless authorized in written, any kind of copying, forwarding, disclosing, receiving this document or any part of it is not allowed.

DG

REV: A03

商业秘密

Eye safety and disclaimer

Security recommendations

Depending on the usage of the device, the module may emit highly concentrated invisible infrared light that is harmful to the human eye. Products containing these modules may be required to follow the safety precautions specified in IEC 60850-1 and IEC62471.

Product Disclaimer

Dogain Optoelectronic Technology (Suzhou) Co., Ltd. and its employees shall not be liable for any errors, inaccuracies or incompleteness contained in any data sheet or any product-related information.

We make no representations or warranties as to the fitness of the Products for any particular purpose or whether to continue to manufacture any Products. To the fullest extent permitted by applicable law, DoGain will not be liable for:

1. Any liability arising from the application or use of any of the products.
2. Any implied warranties, including warranties of fitness for a particular purpose, non-infringement and merchantability. We hereby declare that we shall not be liable for any direct, indirect, consequential, punitive, special or incidental losses (including but not limited to financial profit or loss, business interruption or loss of information) arising out of compliance with or failure to comply with this document.

It is the customer's responsibility to verify that the properties of the particular product described in the product specification are suitable for use in specific application scenarios. The parameters provided in the datasheet and/or specification may vary from application to application and performance may vary over time. All operating parameters, including typical parameters, must be confirmed for each application scenario by the customer's technical experts.

Customer will be solely responsible for all legal, regulatory and safety requirements relating to Customer's products, although information or support may be provided in connection with product applications.

This document does not grant any license to any intellectual property rights, whether express or implied, by estoppel or otherwise. DoGain reserves the right to change any of its products and accompanying documentation without prior notice. Unless modified in the Terms of Sale, the Product Specification may not be extended, including, but not limited to, any warranties made herein.

Note:

No responsibility is assumed for the use of these products. The products can emit Class I~IV radiation and must be operated with extreme care. Avoid directly viewing the laser beam or exposure to specular reflections. Proper eye wear must be worn at all times when operating. VCSEL Chip in the modules are electrostatic-sensitive device and proper ESD protection is required for handling.



本文件及其披露的任何数据的所有权均属于度亘核芯光电技术（苏州）股份有限公司，构成并包含专有信息。除非度亘核芯光电技术（苏州）股份有限公司明确书面授权，否则不具有任何接收或拥有本文件授予或转让复制、使用或披露本文件所含任何信息的权利。

This document including data belongs to the property of DoGain Optoelectronic Technology (Suzhou) Co. Ltd. solely. Unless authorized in written, any kind of copying, forwarding, disclosing, receiving this document or any part of it is not allowed.

DG

REV: A03

商业秘密